

Features

- ▶ Power outlets.
- ▶ Communication (DeviceNet, Ethernet, etc).
- ▶ HVAC environmental systems.
- ▶ Process gas.
- ▶ Customizable panel configurations.
- ▶ Reduce on-site cost, labor, and risk.

Technical Data

Power:

NEMA L5-30 Twist-Lock, 14 AWG to 10 AWG

Data:

Ethernet RJ45, Cat 5e, IP 67\

Profibus: 5 pin - Eurofast, M12, IP 67

DeviceNet: 5 pin - Eurofast, M12, IP 67

Gas:

1/2" Quick Disconnect

Max: 250 psig @ 400°F / 17.2 BAR @ 204°C

Ordering Information

CESS-24-ANOC-A-2P2E-1A

Power Connections (Qty/Amp)

- A - 20 Amp
- B - 32 Amp
- C - 40 Amp
- D - 63 Amp
- X - Blanks Only

Data Connection Type

- P - Profibus
- E - Ethernet
- D - DeviceNet
- X - None

Environmental

- A - Air Supply/Exhaust
- W - Water Supply/Return (TCU)
- X - None

Gas Connection

- A - Compressed Air
- N - N₂
- O - O₂
- C - CO₂
- X - None

Panel Size


- 22 - 2x2
- 24 - 2x4

Panel Material


- CESS - 304 Stainless Steel (Brushed)
- CEAL - Aluminum (Powder Coated)

Note Product availability and specifications contained herein are subject to change without notice. Consult factory for potential revisions.

CE Series Panel Drop-In Ceiling Panel

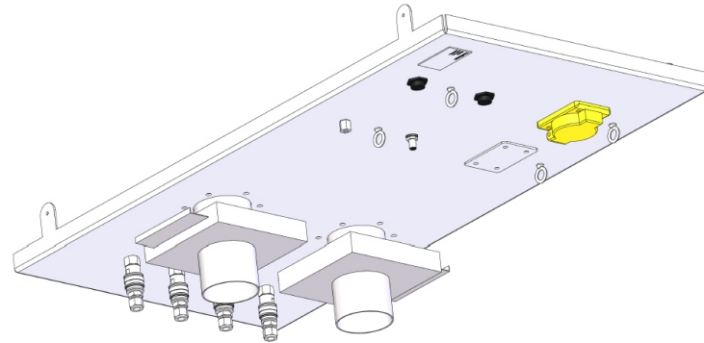

Dimensions

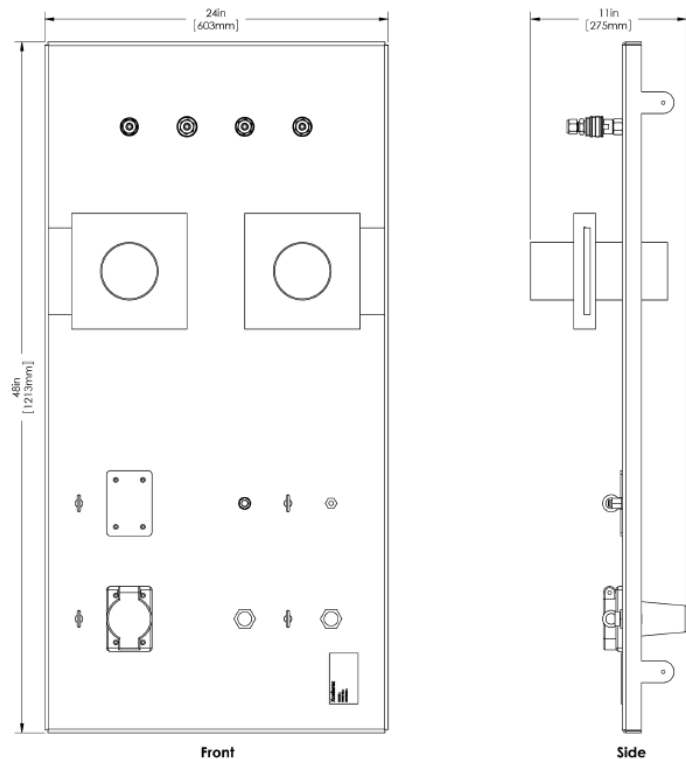

BioPharm Engineered Systems

A Critical Process Systems Group Company

200 Bulfinch Drive, Andover, MA 01810

+1 978.691.2737 | F +1 978.691.2733

www.bpesys.com

CONFIDENTIAL

REV: CPS 03032016